


便

| 便携式储能 源

好



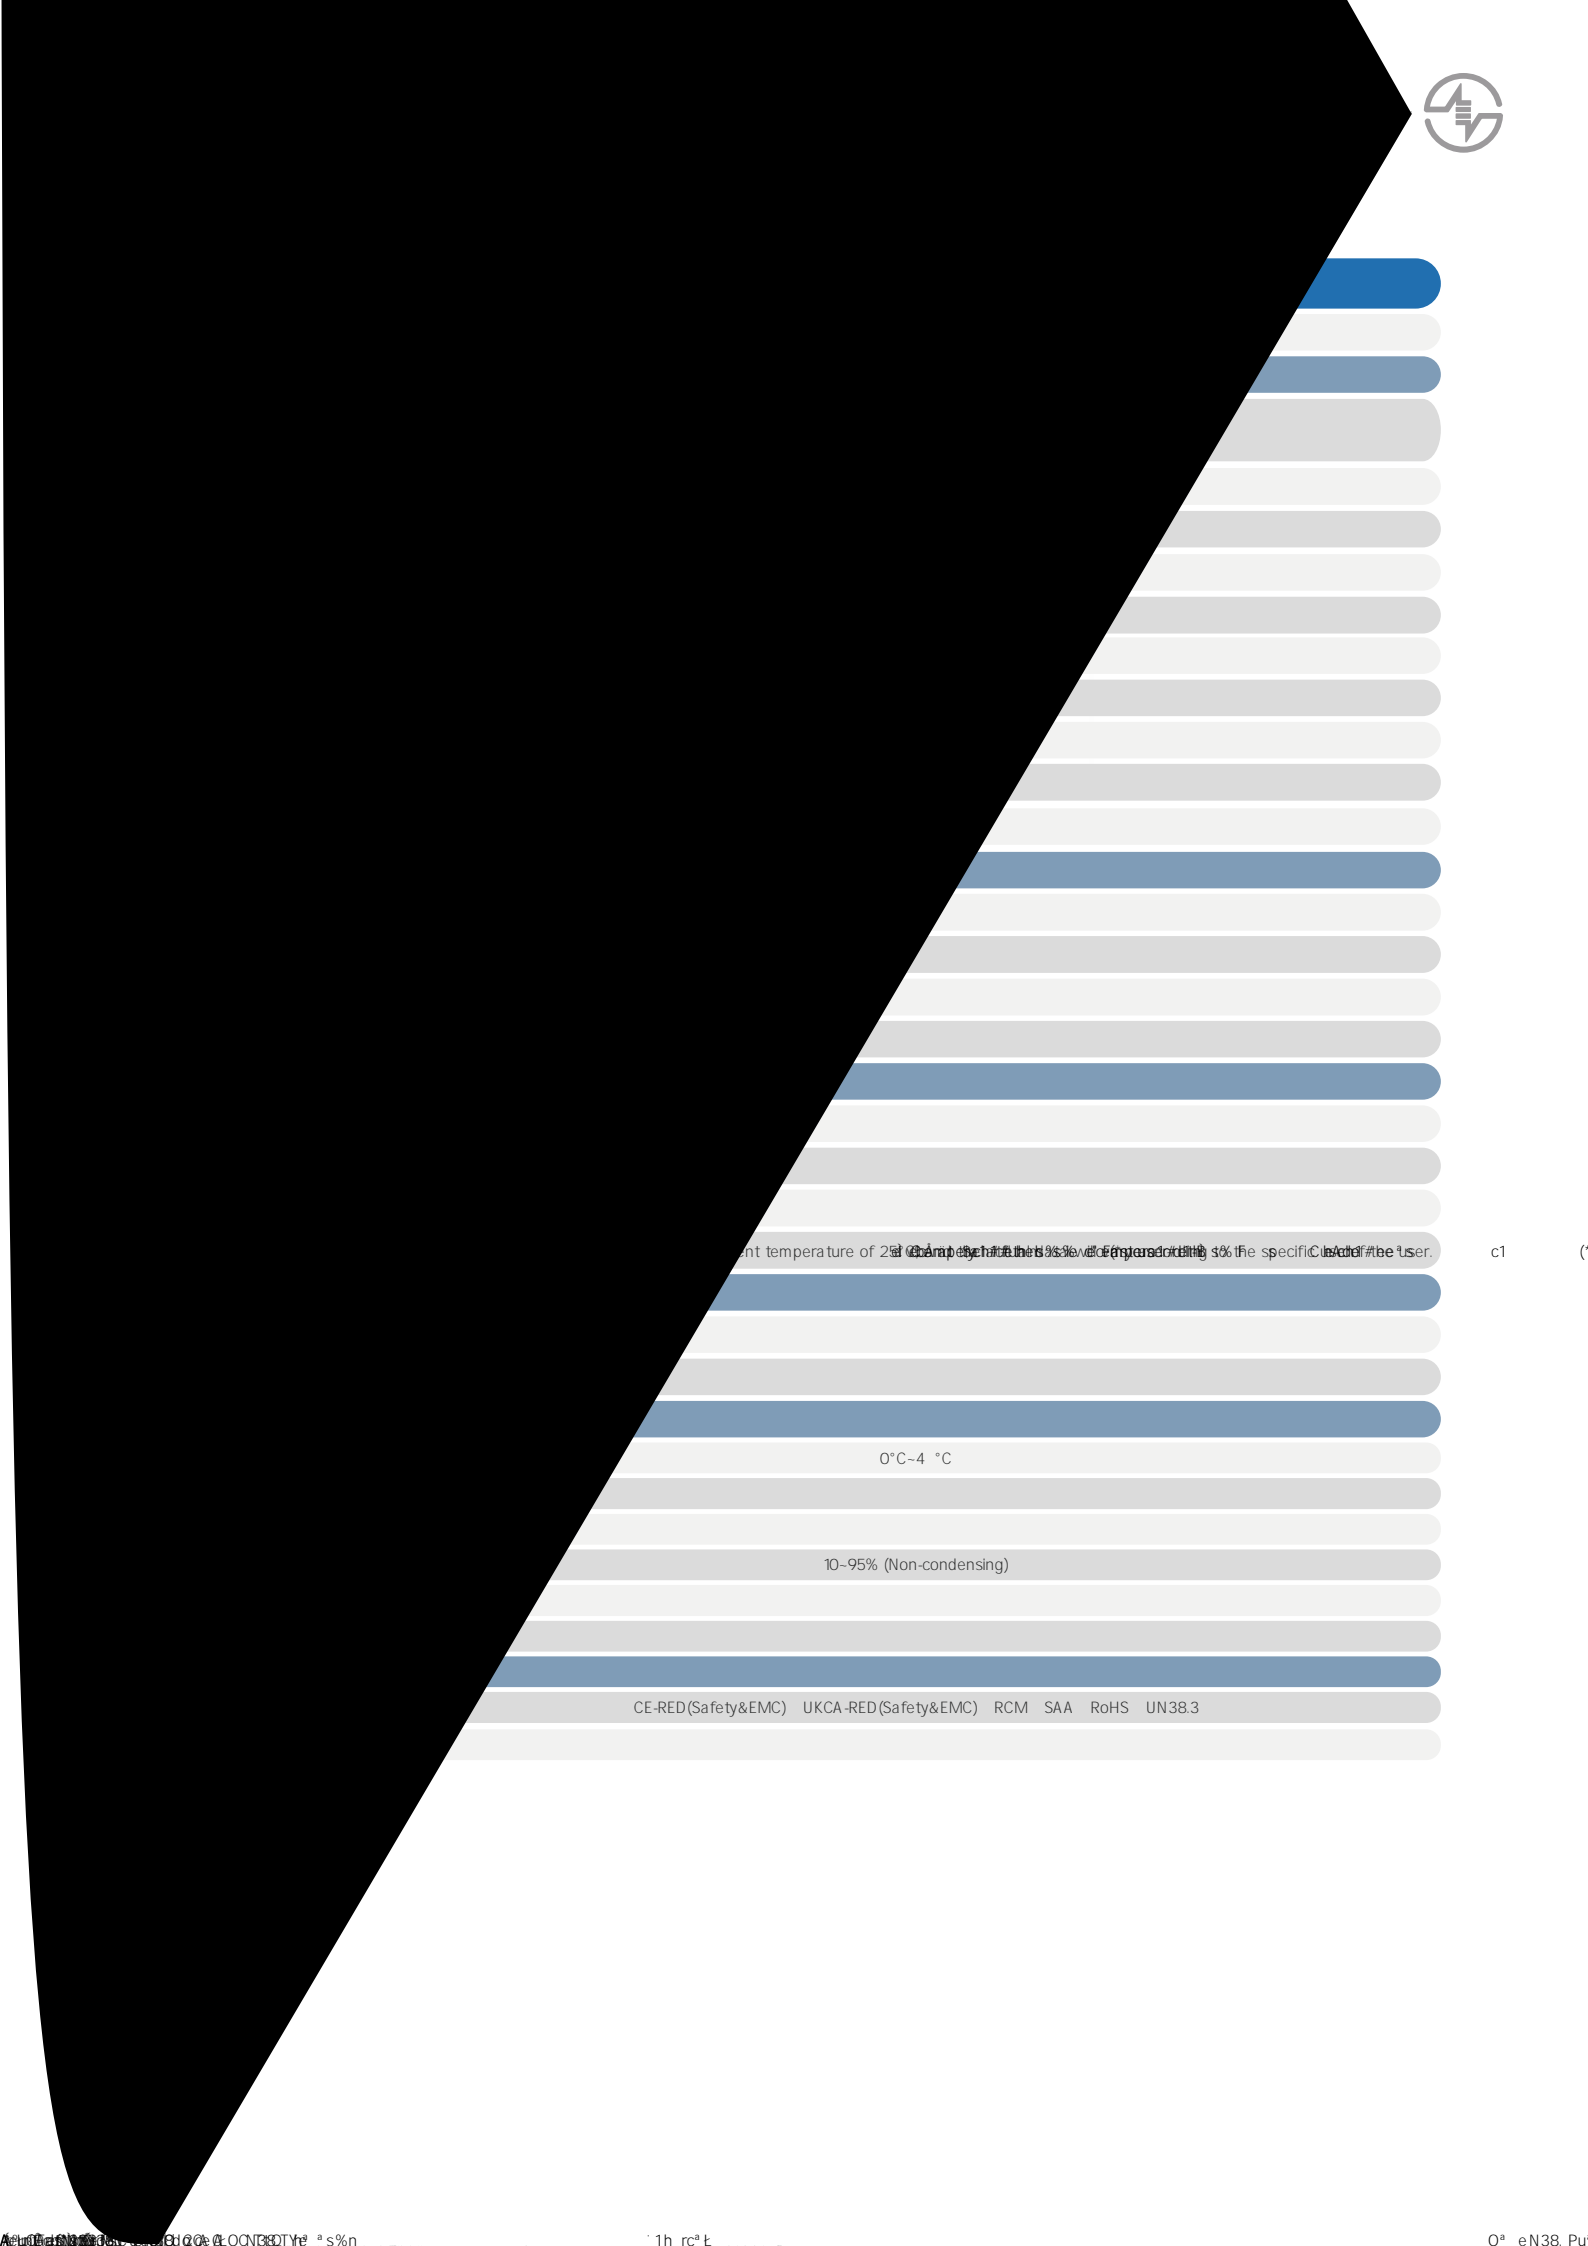

Operating temperature of 25°C. Complete the 95% of the product life cycle. The specific heat of the user.

0°C-4 °C

10-95% (Non-condensing)

CE-RED(Safety&EMC) UKCA-RED(Safety&EMC) RCM SAA RoHS UN38.3

c1

(